



Certified

GS1 benchmark



DIN-plus certified



Tested safety



## EURO H1 hygienic pallet

with central detent and antislip edge | 1200 x 800 mm

### USE | REQUIREMENT



The EURO H1 pallet has been the leading hygienic pallet for years. It is used in all areas of industry and retail where a high hygiene standard is required.

### FEATURES



- Awarded the GS mark for tested safety
- DIN-plus certified
- According to the GS1 requirements profile (replacing EHI certification)
- The basis for all common box systems
- Compatible with half-pallet H2 and E-box systems
- Very good cleaning properties
- Dimensionally stable from -40°C to +70°C
- With central detent and antislip edge

### FACTS & FIGURES

Dimensions: 1200 x 800 x 160 mm  
 Weight: 18 kg  
 Dynamic load-carrying capacity: 1250 kg  
 Material: Virgin HDPE plastic  
 Floor contact: Closed runner system

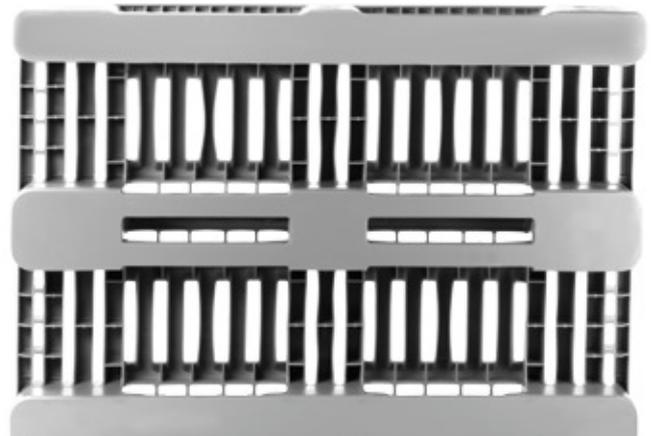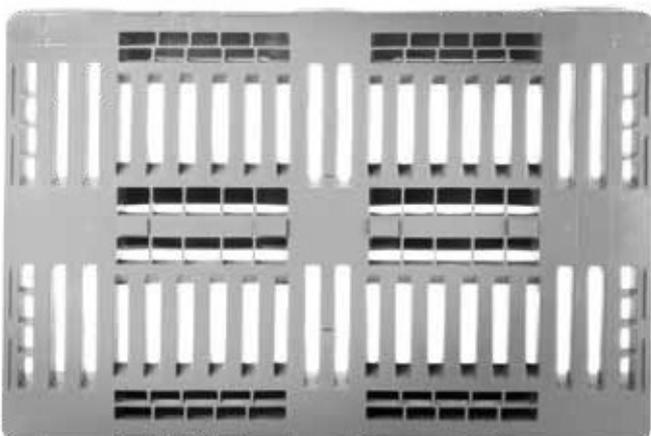

## EURO H1 hygienic pallet with central detent and antislip edge | 1200 x 800 mm

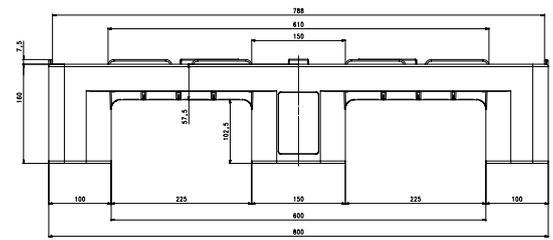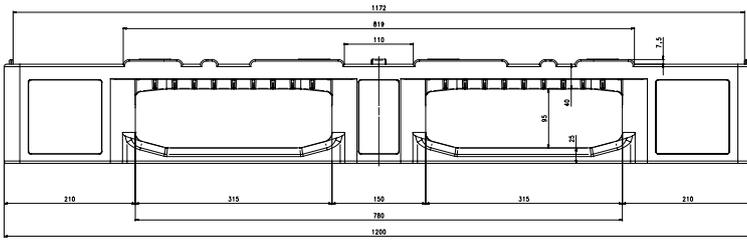

Type	Art. no.	Features						Technical details				Material				
		Colours	2 runners welded	3 runners welded	3 runners, non-welded	5 runners, non-welded	Outer, antislip edge (mm)	Central detent	Dimensions (mm)	Weight (kg)	Static load-carrying capacity (kg)	Dynamic load-carrying capacity (kg)	In a racking system (kg)	HDPE	Virgin plastic	PE regenerate
EURO H1	272-34613000	light grey	●				7	●	L: 1200 W: 800 H: 160	18	5000	1250	1000	●	●	

**Static load:**  
Compression strength with level floor contact and evenly distributed load at approx. 20°C room temperature.

**Dynamic load:**  
On the forklift with selected, evenly distributed load at approx. 20°C room temperature.

**In a racking system:**  
With evenly distributed load along the longitudinal sides (goods in bags), resting on two supports for more than 100 h at approx. 20°C room temperature.

All the technical details are characteristic properties which have been determined under specific test conditions. Different values may be obtained when used under different conditions, such as load type, ambient temperature and standing time, which can be tested upon request.

### LOGO Marking

Hot embossing of lettering, logos and numbers possible upon request, depending on quantity.

Position: Forklift openings / 800mm sides  
Size: max. 220 x 30 mm  
Quantity: 15 pcs, with 15 mm letters  
30 pcs, with 30 mm letters  
(1-3 lines possible)

- Optimum transport safety thanks to antislip edge on 4 sides
- Additional central detent
- Ideal for use with E-boxes
- According to the requirements profile from GS1
- Fully exchangeable
- DIN-plus certified
- Awarded the GS "Tested safety" mark
- Closed runner system with welded runners

