



## H3 hygienic pallet

with antislip edge | 1200 x 1000 mm

### USE | REQUIREMENT



The H3 hygienic pallet is ideal for medium-heavy loads in changing temperature ranges. The welded and closed runner system of the H3 hygienic pallet guarantees daily high capacity and stability.

### FEATURES



- High capacity thanks to welded runners
- For medium-heavy loads
- Very good cleaning properties
- Dimensionally stable from  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- With antislip edge

### FACTS & FIGURES

Dimensions: 1200 x 1000 x 160 mm  
Weight: 22 kg  
Dynamic load-carrying capacity: 1250 kg  
Material: Virgin HDPE plastic  
Floor contact: Closed runner system

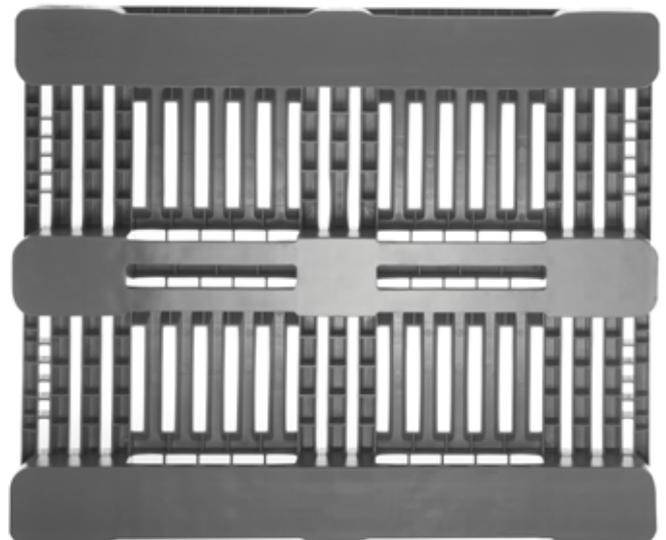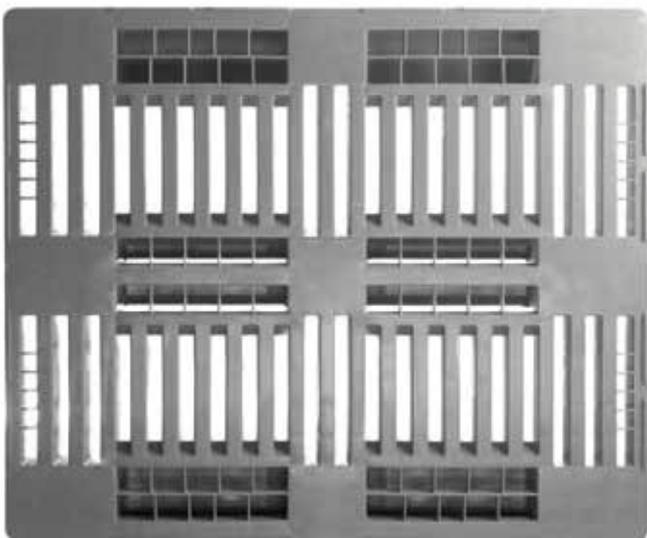

**H3 hygienic pallet**  
with antislip edge | 1200 x 1000 mm

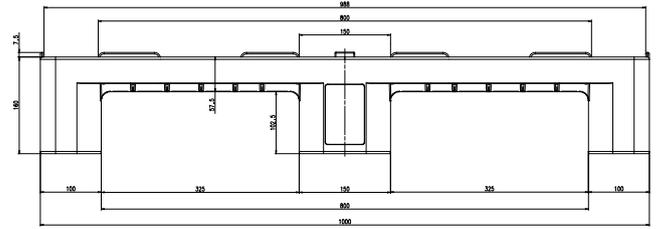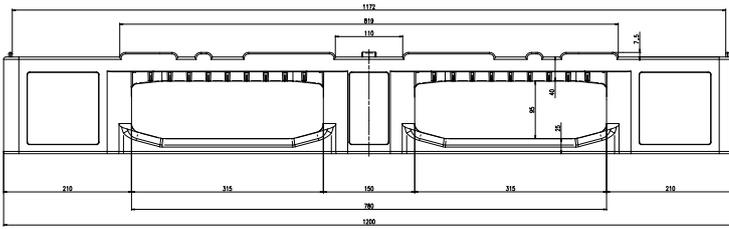

Type	Art. no.	Features						Technical details				Material										
H3	272-34633OM0	light grey	2 runners welded	3 runners welded	3 runners, non-welded	5 runners, non-welded	Outer, antislip edge (mm)	7	Central detent	Dimensions (mm)	L: 1200 W: 1000 H: 160	Weight (kg)	22	Static load-carrying capacity (kg)	5000	Dynamic load-carrying capacity (kg)	1250	In a racking system (kg)	850	HDPE	Virgin plastic	PE regenerate

**Static load:**  
Compression strength with level floor contact and evenly distributed load at approx. 20°C room temperature.

**Dynamic load:**  
On the forklift with selected, evenly distributed load at approx. 20°C room temperature.

**In a racking system:**  
With evenly distributed load along the longitudinal sides (goods in bags), resting on two supports for more than 100 h at approx. 20°C room temperature.

All the technical details are characteristic properties which have been determined under specific test conditions. Different values may be obtained when used under different conditions, such as load type, ambient temperature and standing time, which can be tested upon request.

**LOGO**  
Marking

Hot embossing of lettering, logos and numbers possible upon request, depending on quantity.

Position: Forklift openings / 1200mm sides  
Size: max. 2x 280 x 30 mm  
Position: Outer feet / 1200mm sides  
Size: max. 90 x 90 mm  
Quantity: 18 pcs, with 15 mm letters  
13 pcs, with 30 mm letters (1 line)

- Optimum transport safety thanks to antislip edge on 4 sides
- Closed runner system with welded runners

