



IKP 1215

with antislip edge | 1200 x 1000 mm

USE | REQUIREMENT



The IKP product range is made from homogeneous recycled PE. It is a robust, dimensionally stable, lightweight, industrial-sized pallet. It stands out in particular due to its numerous possible variations and thus areas of application. Depending on the load capacity and safety requirements for transport, up to 6 steel profiles and 12 antislip plugs can be fitted.

FEATURES


- Made from unmixed HDPE regenerate – optionally also from ESD or virgin plastic
- Dimensionally stable from -30°C to +60°C
- Lightweight pallet
- Particularly robust and economical for high loads
- Special colours and material possible for quantities above 500

FACTS & FIGURES

Dimensions: 1200 x 1000 x 150 mm
 Weight: 15 kg
 Dynamic load-carrying capacity: 1000 kg
 Material: HDPE regenerate
 Floor contact: Open runner system

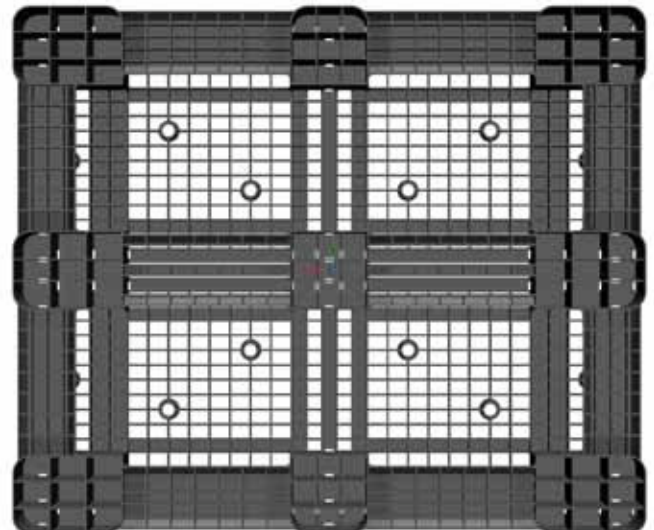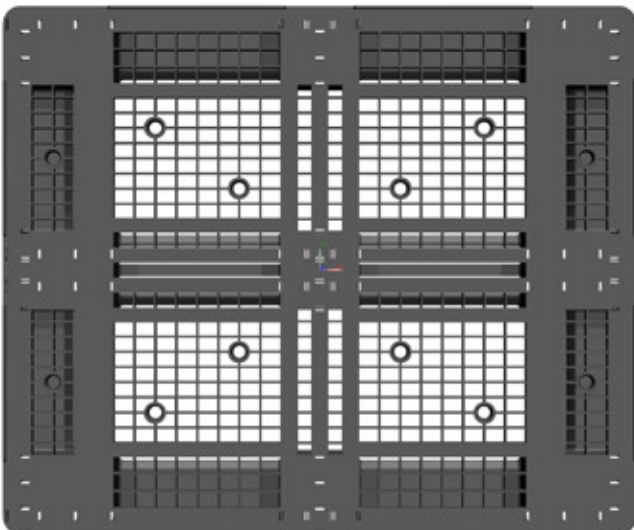

IKP 1215 with antislip edge | 1200 x 1000 mm

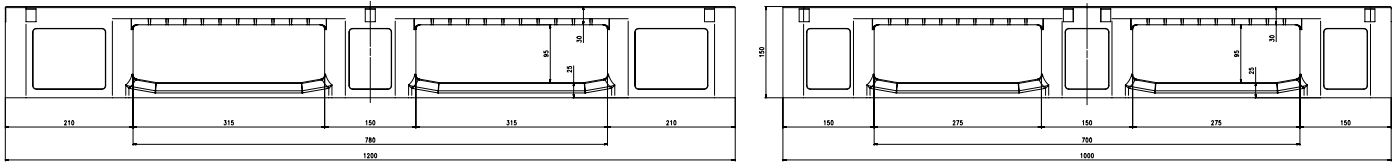

| Type | Art. no. | Features | | | | | | Technical details | | | | Material | | | | |
|----------|--------------|----------|------------------|------------------|-----------------------|-----------------------|---------------------------|-------------------|------------------------------|-------------|------------------------------------|-------------------------------------|--------------------------|------|----------------|---------------|
| | | Colours | 2 runners welded | 3 runners welded | 3 runners, non-welded | 5 runners, non-welded | Outer, antislip edge (mm) | Central detent | Dimensions (mm) | Weight (kg) | Static load-carrying capacity (kg) | Dynamic load-carrying capacity (kg) | In a racking system (kg) | HDPE | Virgin plastic | PE regenerate |
| IKP 1215 | 274-30510220 | black | | | | ● | 7 | | L: 1200 W: 1000 H: 150 | 15 | 5000 | 1000 | 400 | ● | | ● |

↓ Static load:
Compression strength with level floor contact and evenly distributed load at approx. 20°C room temperature.

→ Dynamic load:
On the forklift with selected, evenly distributed load at approx. 20°C room temperature.

↑ In a racking system:
With evenly distributed load along the longitudinal sides (goods in bags), resting on two supports for more than 100 h at approx. 20°C room temperature.

All the technical details are characteristic properties which have been determined under specific test conditions. Different values may be obtained when used under different conditions, such as load type, ambient temperature and standing time, which can be tested upon request.



Hot embossing of lettering, logos and numbers possible upon request, depending on quantity.

- Special colours and material for quantities above 500 possible.

- 7 mm antislip edge

- Up to 12 antislip plugs possible

- Up to 6 steel profiles possible

- Chamfered edges on both sides

