



KRP 1208

1200 x 800 mm

USE | REQUIREMENT

The KRP product range is made from homogeneous recycled PE. The pallets are robust, dimensionally stable and secure, for high load capacities. Perfectly suited for use in the non-food area.


By using KRP recycling pallets you can save time and money, thereby achieving a high level of profitability and efficiency in your logistics.

FEATURES



- Made from homogeneous HDPE regenerate – optionally also from ESD (Electrostatic Discharge)
- Dimensionally stable from -30°C to +60°C
- Optionally with central detent or/and with an 11mm antislip edge (special design)
Perfect for transporting small load carrier containers
- Optionally with welded runners

FACTS & FIGURES

Dimensions: 1200 x 800 x 160 mm
Weight: 16 kg
Dynamic load-carrying capacity: 1000 kg
Material: HDPE regenerate
Floor contact: Open runner system

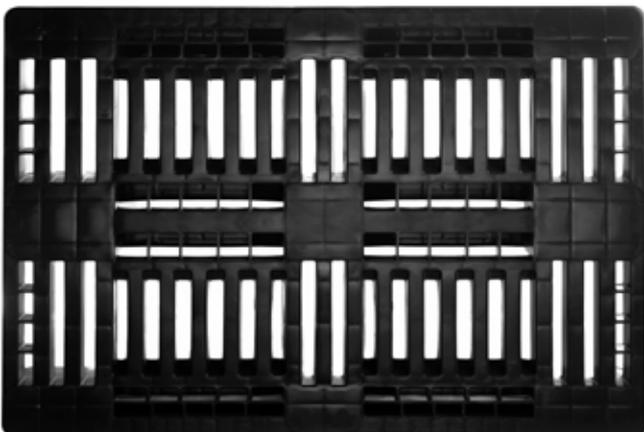

KRP 1208
1200 x 800 mm

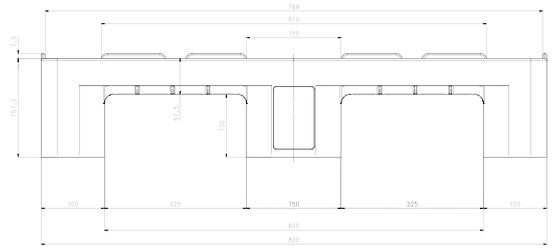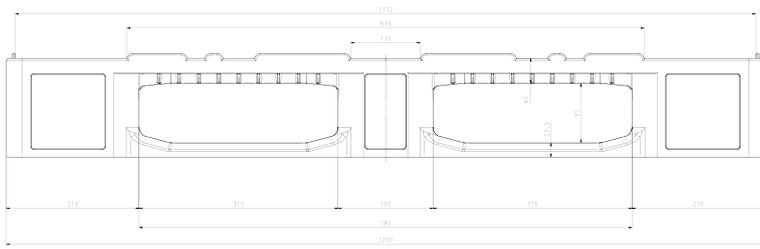

Type	Art. no.	Features						Technical details				Material			
		Colours	2 runners welded	3 runners welded	3 runners, non-welded	5 runners, non-welded	Outer, antislip edge (mm)	Central detent	Dimensions (mm)	Weight (kg)	Static load-carrying capacity (kg)	Dynamic load-carrying capacity (kg)	In a racking system (kg)	HDPE	Virgin plastic
KRP 1208	275-34702RG0	black			●			L: 1200 W: 800 H: 160	16	4000	1000		●		●
KRP 1208	275-34712RG0	black			●		7	L: 1200 W: 800 H: 160	16	4000	1000		●		●

↓ **Static load:**
Compression strength with level floor contact and evenly distributed load at approx. 20°C room temperature.

→ **Dynamic load:**
On the forklift with selected, evenly distributed load at approx. 20°C room temperature.

↑ **In a racking system:**
With evenly distributed load along the longitudinal sides (goods in bags), resting on two supports for more than 100 h at approx. 20°C room temperature.

All the technical details are characteristic properties which have been determined under specific test conditions. Different values may be obtained when used under different conditions, such as load type, ambient temperature and standing time, which can be tested upon request.



Hot embossing of lettering, logos and numbers possible upon request, depending on quantity.

Position: Forklift openings / 800mm sides
Size: max. 220 x 30 mm
Quantity: 15 pcs, with 15 mm letters
30 pcs, with 30 mm letters
(1-3 lines possible)

- Optimum transport safety thanks to antislip edge on 4 sides
- Secure handling with 11mm antislip edge
- Ideal for small load carrier containers
- Open runner system
- Chamfered edges on both sides

