



## KRP 1210

with antislip edge | 1200 x 1000 mm

### USE | REQUIREMENT

The KRP product range is made from homogeneous recycled PE. The pallets are robust, dimensionally stable and secure, for high load capacities. Perfectly suited for use in the non-food area.



By using KRP recycling pallets you can save time and money, thereby achieving a high level of profitability and efficiency in your logistics.

### FEATURES



- Made from homogeneous HDPE regenerate – optionally also from ESD (Electrostatic Discharge)
- Dimensionally stable from -30°C to +60°C

### FACTS & FIGURES

Dimensions: 1200 x 1000 x 160 mm  
Weight: 19.5 kg  
Dynamic load-carrying capacity: 1250 kg  
Material: HDPE regenerate  
Floor contact: Open runner system

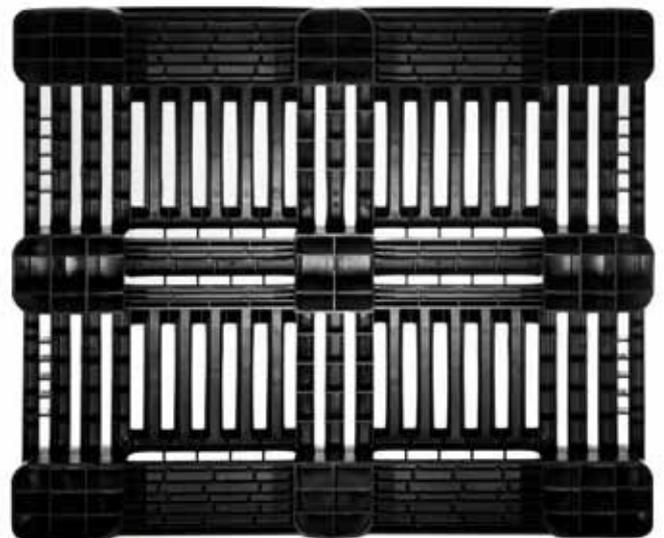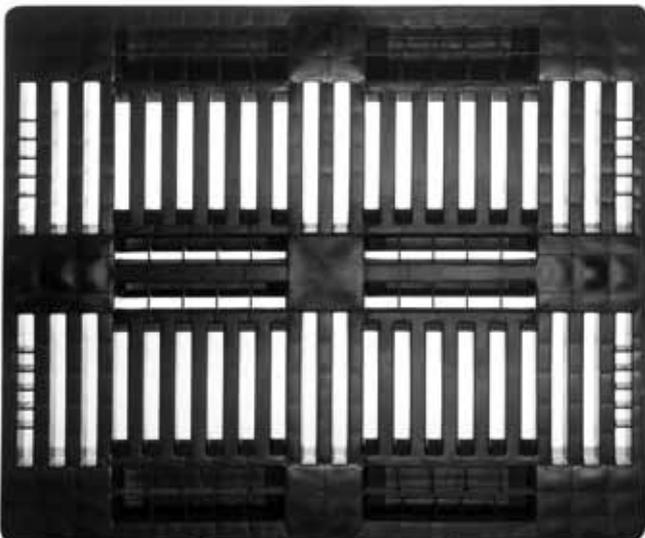

## KRP 1210 with antislip edge | 1200 x 1000 mm

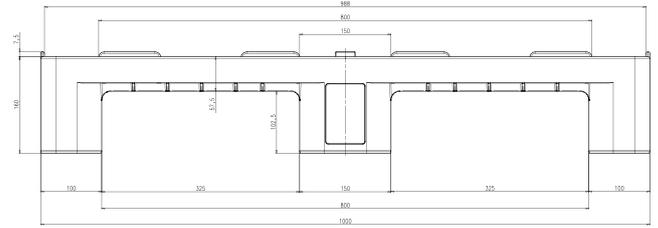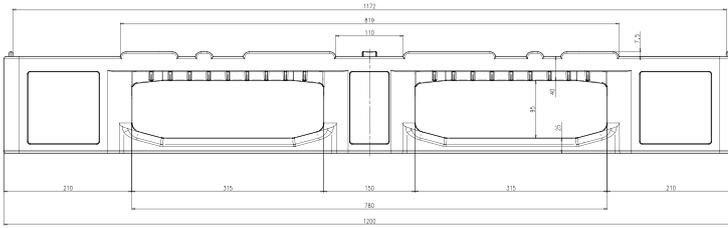

Type	Art. no.	Features						Technical details				Material				
		Colours	2 runners welded	3 runners welded	3 runners, non-welded	5 runners, non-welded	Outer, antislip edge (mm)	Central detent	Dimensions (mm)	Weight (kg)	Static load-carrying capacity (kg)	Dynamic load-carrying capacity (kg)	In a racking system (kg)	HDPE	Virgin plastic	PE regenerate
KRP 1210	275-34812RG0	black			●		7		L: 1200 W: 1000 H: 160	19.5	5000	1250	600	●		●

**Static load:**  
Compression strength with level floor contact and evenly distributed load at approx. 20°C room temperature.

**Dynamic load:**  
On the forklift with selected, evenly distributed load at approx. 20°C room temperature.

**In a racking system:**  
With evenly distributed load along the longitudinal sides (goods in bags), resting on two supports for more than 100 h at approx. 20°C room temperature.

All the technical details are characteristic properties which have been determined under specific test conditions. Different values may be obtained when used under different conditions, such as load type, ambient temperature and standing time, which can be tested upon request.

### LOGO Marking

Hot embossing of lettering, logos and numbers possible upon request, depending on quantity.

Position: Forklift openings / 1200mm sides  
Size: max. 2x 280 x 30 mm  
Position: Outer feet / 1200mm sides  
Size: max. 90 x 90 mm  
Quantity: 18 pcs, with 15 mm letters  
13 pcs, with 30 mm letters  
(1 line)

- Optimum transport safety thanks to antislip edge on 4 sides

- Open runner system

